

Mechanical Timer Switch


INSTRUCTION MANUAL

This manual will assist you with installation and use, Please read it carefully before operation.

SPECIFICATIONS

Model No.	MT06A-4P
Power Input	~220-240V 50Hz
Power Output	16(4)A 3600W
Min Setting Time	15 Minutes
Max Setting Time	24 Hour
Max Groups	48 on/off cycles per day
Operation Temperature	-10 to 55°C
IP Code	IP2.0
Switch Life	>5000Times

PRODUCTS VIEW

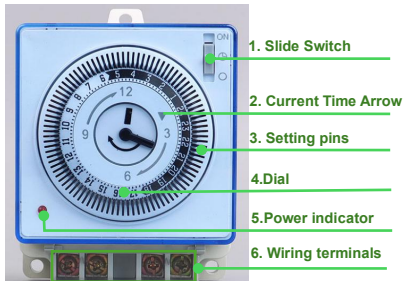

1.Slide Switch:

- ON = Always ON
- 🕒 = Automatic(Timer)
- O = Always OFF

2.Arrow: Indicates the current time of day.

3.Setting Pins:

- Each pin represents 15 minutes.
- Push pin outside = ON
- Push pin inside = OFF

4.Dial: 1-24Hours

The dial and setting pins rotate with time during work.


5.Power indicator

The power indicator lights up when working.

6.Wiring terminals

One input and One output

Clock Dial Guide

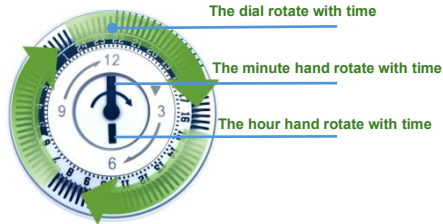

How to set up?

Step 1. Push all setting pins to inside.

Step 2. Push all setting pins to outside within this time period(s) which you want the device to be turned on .

Example:

"ON" time is 18:00PM,"OFF" time is 22:15PM.Push all pins to outside between 18:00PM and 22:15PM.




Step 3. Rotate the timer's dial clockwise until the arrow points to the current time.

Step 4. Slide the switch to ☹ position.

Note

1. Before first time use or after power failure, the current time should be set to correct time.
2. When the pin is stuck, please make sure that the pin is not pressed down at the arrow position, in which case you need to rotate the dial to make it work normally.
3. Do not turn the dial counterclockwise during operation

Terminal wiring diagram

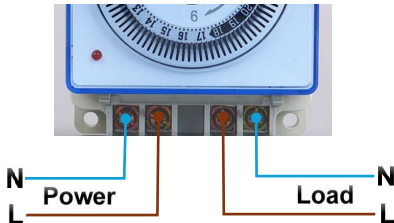

WARNING

- 1.Please cut off the power supply before installation to avoid the risk of electric shock!
- 2.During the installation, strictly follow the wiring diagram.
- 3.The product should be firmly fixed in the junction box or on the wall.
- 4.Check electrical appliance voltage and rated current before use. Make sure that total power does not exceed 3600W and Max loading doesn't exceed 16(4)A when using this product.
- 5.Touch and setting with dry hand only.
- 6.Not suitable for keeping or using in a damp place.